



PORTABLE / LABORATORY DENSITY METER

FOR LIQUEFIED PETROLEUM GASES (LPG)

LPGDi

IN PROCESS TO EXCELLENCE

Specifications

Measuring range:

Density	0.4750...1.0000 g/cm ³ (475...1000 kg/ m ³)
Density Standard calibration	0.6... 1.2 g/cm ³ (600... 1200 kg/m ³)
	0.9... 1.8 g/cm ³ (900... 1800 kg/m ³)
Temperature	0...+40°C (0...+105°F)

Accuracy:

Density	±0.0005 g/cm ³ (±0.5 kg/m ³)
Temperature	±0.1°C (±0.2°F)

Repeatability:

Density	±0.00025 g/cm ³ (±0.25 kg/m ³)
Temperature	±0.1°C (±0.2°F)

Resolution:

Density	0.0001 g/cm ³ (0.1 kg/m ³)
Temperature	±0.01°C (0.02°F)

Supported measuring units

Real Density: g/cm³, kg/m³, lb/gal, lb/ft³; API; SG
 Referred Density: at 15°C, 20°C, 60°F; API60; SG60
 Tables ASTM D 1250
 Alcohol Tables
 Temperature in °C or °F

Ambient temperature	-40... +85°C (-40... +185°F)
---------------------	------------------------------

Maximal Pressure	16 bar
------------------	--------

Sensor:

Type	Vibrating element (Resonance principle)
Material	Stainless steel SS 316 L; NiSpan C; Hastelloy C22, Teflon

Contact Surface Material	Duralumin
--------------------------	-----------

Intrinsically safe:

Controller	ATEX II (2G) EEx ib [ia] IIB T4
Sensor	ATEX II 1G EEx ia IIB T4

Power supply	110 - 230 V with adapter 12/24 VDC (car lighter)
--------------	-----------------------------------------------------

Dimensions, weight:

Height	245 mm (9.6 in)
Length	225 mm (8.8 in)
Cylinder diameter	120 mm (4.7 in)
Weight	6 kg (13.2 lb)

Temperature compensation	Automatic
--------------------------	-----------

Sample volume	200 ml
---------------	--------

Data Transfer	RS 232, Bluetooth
---------------	-------------------

Data handling	Backlighted LCD display (2x16) Local memory up to 1000 results with date/time stamped Build in Bluetooth for data transfer to printer or PC Optional Windows - based software
---------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Delivery	Delivered in compact carrying case
----------	------------------------------------

Unique Laboratory portable Density Meter is a new development especially for liquefied petroleum gases (LPG) measuring. It is based on the resonant method of density measurements and uses small sample volume. Obtained results are instantly converted to relative density (15°C or 20°C or 60°F) in accordance with ASTM D1250 tables. Readings on the LCD facilitate measuring process and eliminate eventual human error. Compact design makes suitable to any place in your laboratory. Additional car power option makes it portable. Combination with PC or Pocket PC makes it as a complete data managing system. Windows based Software allows necessary data processing and simplifies operation for personnel.

Data transmission to PC, pocket PC or portable printer via Bluetooth connection. Compatible for a Windows XP/Vista/7.




Advantages

- Precise density and temperature in seconds
- Excellent correlation to ASTM D1657
- Small sample volume
- Readings on LCD
- Easy to operate
- Automatic temperature compensation
- Data transfer to PC

Applications

- Gases fuel stations
- LPG storage tanks
- Product identification and consistency
- Calculation of propane/n-butane mass concentration
- Petroleum products process transfer
- Monitoring of technological process heating
- Liquefied Petroleum Gases (LPG)

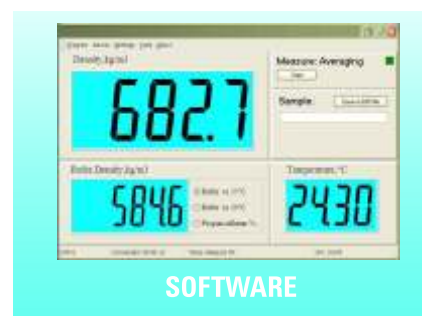

For more information please visit www.lemis-usa.com



LEMIS USA, Inc
15556 Summit Park Dr., Suite 601
Montgomery
TX 77356, USA
Ph.: +1 281 465 8441
E-mail: info@lemis-usa.com

